

C0 Stain Repellent

Seating

# Staccato 8077



Real Red  
7040



Burgundy  
7012




Suede  
7045




Azure  
7033



Navy  
7018

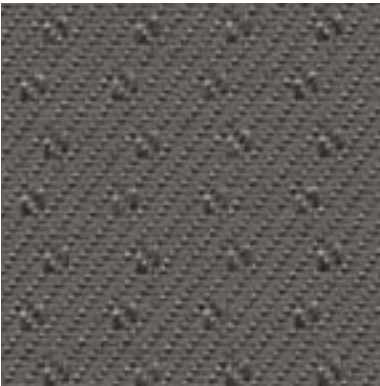

Slate  
7037

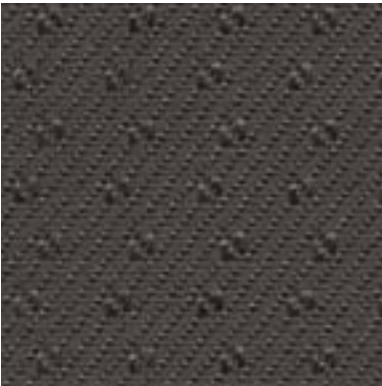

Calcine Gray  
7047



Black  
7020

duvaltex

# Staccato 8077

Seating

## Specifications

|           |                                 |
|-----------|---------------------------------|
| Content   | 100% nylon                      |
| Weight    | 14.9 ± 1.0 oz./lin. yd          |
| Width     | 54" min. useable                |
| Repeat    | 0.6" vertical   0.5" horizontal |
| Backing   | acrylic backcoating             |
| Treatment | C0 stain repellent              |

## Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

## Miscellaneous

- Application testing of this product is recommended.
- Colors may vary between dye lots.
- This is a directional fabric.

Proudly woven in North America supporting our local communities.

## Sustainability



## Performance

|                                                                                     |                                                                                   |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|  | <b>Colorfastness to light (AATCC 16.3 Option 3)</b><br>Grade 4 min. at 40 hours   |
|  | <b>Colorfastness to crocking (AATCC 8)</b><br>Grade 4 min. dry & Grade 3 min. wet |
|                                                                                     | <b>Breaking Strength (ASTM D5034)</b><br>590 lbf min. warp and 370 lbf min. fill  |
|  | <b>Seam Slippage (ASTM D4034)</b><br>115 lbf min. warp and 105 lbf min. fill      |
|                                                                                     | <b>Pilling Resistance (ASTM D3511)</b><br>Class 5                                 |
|  | <b>Flammability</b><br>CA Technical Bulletin 117-2013 Section 1                   |
|  | <b>* Abrasion (ASTM D4157)</b><br>150,000 double rubs min. cotton duck            |

\*Certification Marks owned by the Association for Contract Textiles, Inc.

duvaltex

USA & INTERNATIONAL | T 800-544-0200  
CANADA | T 418 227-9897  
For samples, visit [duvaltex.com](https://duvaltex.com)




Enduit antitache

Tissus à chaises

# Staccato 8077



Real Red  
7040

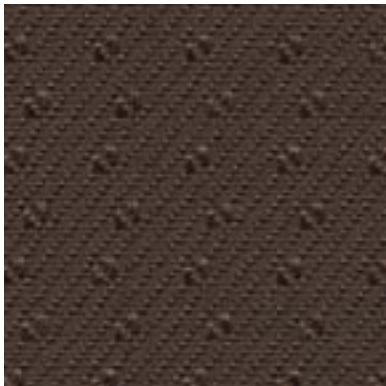


Suede  
7045




Azure  
7033



Navy  
7018

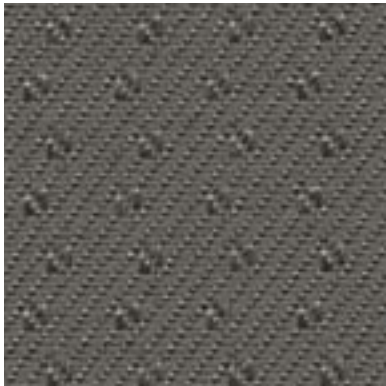

Slate  
7037

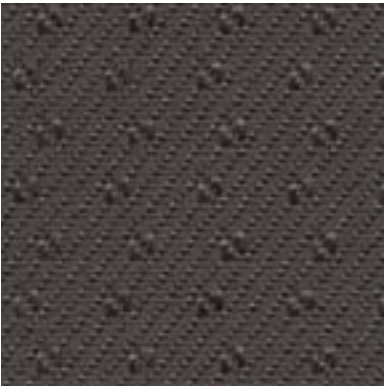

Calcine Gray  
7047



Black  
7020

duvaltex

# Staccato 8077

Tissus à chaises

## Spécifications

|             |                                   |
|-------------|-----------------------------------|
| Composition | 100% nylon                        |
| Poids       | 14.9 ± 1.0 once/vg lin.           |
| Largeur     | 54" min. utilisable               |
| Répétition  | 0.6po vertical   0.5po horizontal |
| Enduit      | enduit acrylique                  |
| Traitement  | enduit antitache C0               |

## Code de nettoyage

Standard de nettoyage WS - nettoyer avec des produits nettoyants à base d'eau, en mousse ou en liquide ou solvant sans eau. Il est recommandé d'utiliser l'aspirateur ou la brosse pour prévenir l'accumulation de poussière ou de salissures. Peut également être désinfecté avec des nettoyeurs à base de peroxyde d'hydrogène, d'alcool et d'ammonium quaternaire (quat).

## Divers

- Il est conseillé de faire des essais d'applications.
- La teinte peut varier d'un lot à l'autre.
- Ce tissu est directionnel.

Tissé en Amérique du Nord en soutien à nos communautés locales.

## Durabilité



## Performance

|  |                                                                                            |
|--|--------------------------------------------------------------------------------------------|
|  | <b>Résistance à la lumière (AATCC 16.3 Option 3)</b><br>40 heures classe 4 minimum         |
|  | <b>Dégorgement (AATCC 8)</b><br>Classe 4 minimum sec et classe 3 humide                    |
|  | <b>Résistance à la rupture (ASTM D5034)</b><br>590 lbf min. chaîne et 370 lbf min. trame   |
|  | <b>Glissement des coutures (ASTM D4034)</b><br>115 lbf min. chaîne et 105 lbf min. trame   |
|  | <b>Résistance au boulochage (ASTM D3511)</b><br>Classe 4 minimum                           |
|  | <b>Inflammabilité</b><br>CA Technical Bulletin 117-2013 Section 1                          |
|  | <b>* Résistance à l'abrasion (ASTM D4157)</b><br>150 000 double frottements toile de coton |

\*Certification Marks owned by the Association for Contract Textiles, Inc.

duvaltex

É.-U. et INTERNATIONAL | T 800-544-0200  
CANADA | T 418 227-9897  
Visitez **duvaltex.com** pour commander des échantillons.

