


C0 Stain Repellent

Seating

# To the Point 4732

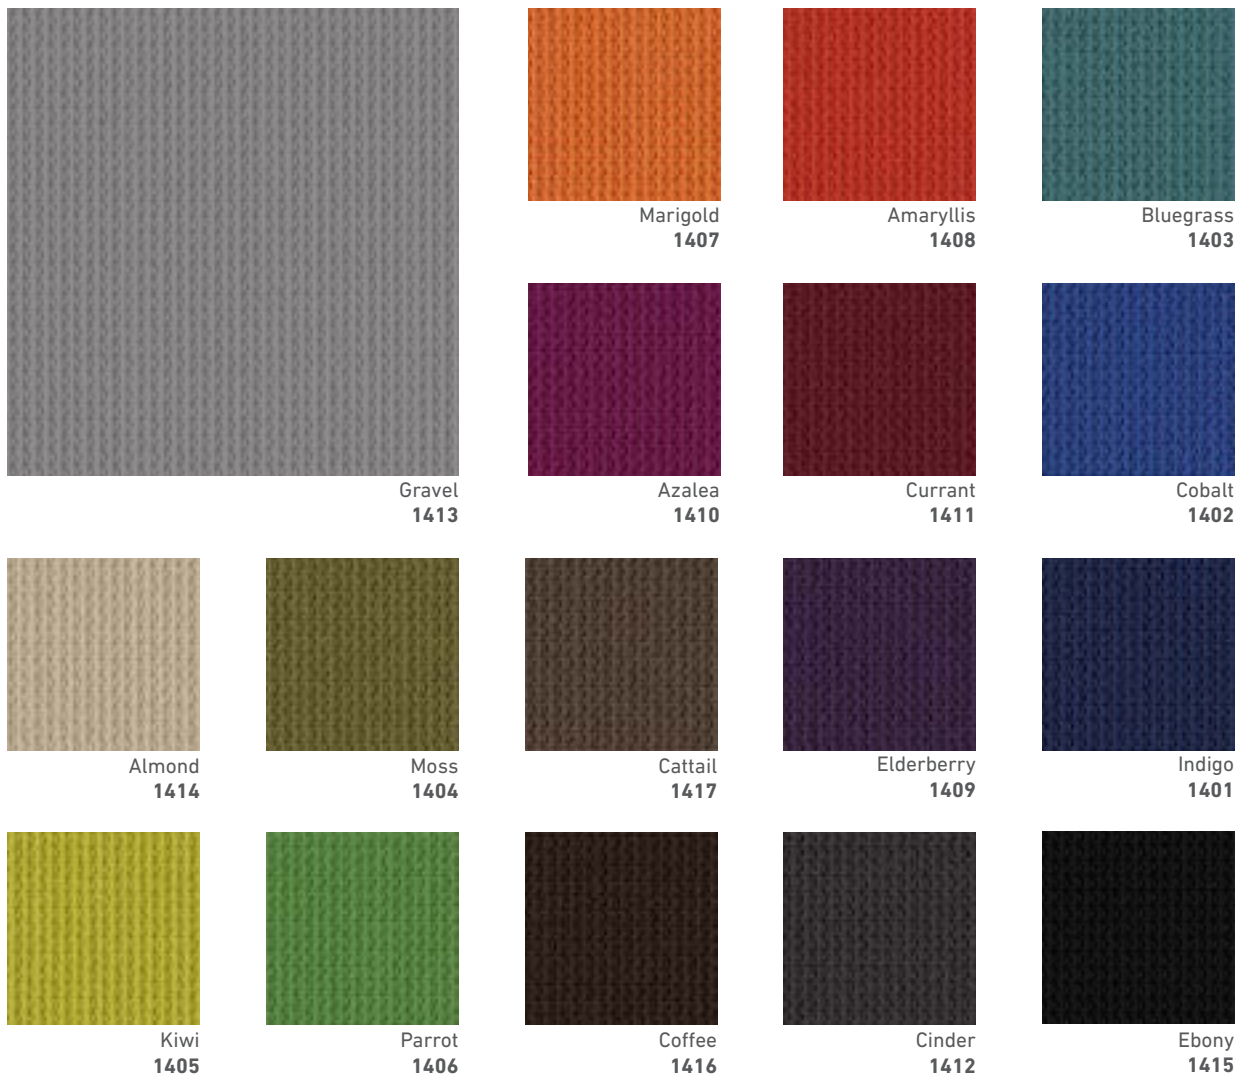

# To the Point 4732

Seating

## Specifications

|           |                                                       |
|-----------|-------------------------------------------------------|
| Content   | 56% polyester<br>44% post-consumer recycled polyester |
| Weight    | 8.7 ± 0.5 oz./lin. yd                                 |
| Width     | 54" min. useable                                      |
| Repeat    | none                                                  |
| Backing   | SRB backcoating                                       |
| Treatment | C0 stain repellent                                    |

## Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

## Miscellaneous

- Application testing of this product is recommended.
- Colors may vary between dye lots.
- This is a directional fabric.

Proudly woven in North America supporting our local communities.

## Sustainability



## Performance

|                                                                                     |                                                                                   |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|  | <b>Colorfastness to light (AATCC 16.3 Option 3)</b><br>Grade 4 min. at 40 hours   |
|  | <b>Colorfastness to crocking (AATCC 8)</b><br>Grade 4 min. dry & Grade 3 min. wet |
|                                                                                     | <b>Breaking Strength (ASTM D5034)</b><br>120 lbf min. warp and 150 lbf min. fill  |
|  | <b>Seam Slippage (ASTM D4034)</b><br>30 lbf min. warp and 45 lbf min. fill        |
|                                                                                     | <b>Pilling Resistance (ASTM D3511)</b><br>Class 4 min.                            |
|  | <b>Flammability</b><br>CA Technical Bulletin 117-2013 Section 1                   |
|  | <b>Abrasion (ASTM D4157)</b><br>50,000 double rubs cotton duck                    |

\*Certification Marks owned by the Association for Contract Textiles, Inc.

duvaltex

duvaltex

USA & INTERNATIONAL | T 800-544-0200  
CANADA | T 418 227-9897  
For samples, visit [duvaltex.com](https://duvaltex.com)



FC-4732 25/10