
PANEL AND ACOUSTIC TEXTILES


DIGITAL BINDER




duvaltex


Amaze 2139

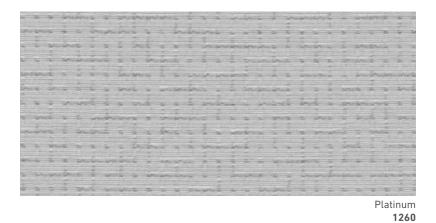










1262

1268







Amaze 2139

Specifications

Content	82% polyester 18% post-consumer recycled polyester
Weight	12.9 ± 1.0 oz./lin. yd
Width	66" min. useable
Repeat	11.7" vertical 12.8" horizontal

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- This is a directional fabric.


Proudly woven in North America supporting our local communities.

Sustainability




Performance













Recycled Content Bleach Cleanable

Seating | Panel | Acoustic

Asteroid

Waterfall 2691

Turquoise **2841**

2053

Goose

2049

Pool **2842**

Pine Needle 2022

Fossil

2093

Thistle 2085

Onyx **2016** Graphite

2079

Cobalt **2045**

Aubergine 2036

Coffee Bean

2083

Midnight 2025

Anchorage 2335 | Open House 2334

White*	Shadow [†]	Birch	Vanilla	Angora
2664	6694	2129	2130	2035
Slate	Wolf	Quarry Blue	Lapis	Deep Water
2017	2027	2026	2094	2051
Cumin	Eucalyptus	Willow	Green Apple	Fern
2050	2047	2028	2087	2840
Straw	Lemon	Sunshine	Goldenrod	Pumpkin
2034	2839	2082	2090	2021
Geranium	Red Delicious	Poppy	Orchid	Mulberry
2084	2014	2091	2843	2044

^{*}Not recommended for use as Upholstery.



Anchorage 2335 Open House 2334

Seating | Panel | Acoustic

Specifications

Content	65% pre-consumer recycled polyester 35% post-consumer recycled polyester
Weight	2334 - 13.1 ± 1.0 oz./lin. yd 2335 - 15.0 ± 1.0 oz./lin. yd
Width	2334 - 54" min. useable 2335 - 66" min. useable
Repeat	none

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Bleach Cleanable - May be cleaned with a 10% bleach-to-water solution. Rinse well after cleaning. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- Please specify when ordering whether 54" or 66" width is needed. Dye lots may vary. Differences may also occur between corresponding colors of Anchorage 2335 and Open House 2334.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable



Renowned for its exceptional performance and style, Guilford of Maine has set industry standards in acoustics and panel fabrics for many decades. We present the Guilford of Maine Collection - a selection of timeless fabrics.

Performance

*

Colorfastness to light (AATCC 16.3 Option 3)

Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8)
Grade 4 min. dry & Grade 3 min. wet

Breaking Strength (ASTM D5034) 275 lbf min. warp and fill



Seam Slippage (ASTM D4034)

50 lbf min. warp and fill Pilling Resistance (ASTM D3511)

Class 4 min.



Flammability

CA Technical Bulletin 117-2013 Section 1 ASTM E84 Class I or A



Abrasion (ASTM D4157)

250,000 double rubs min. cotton duck

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

85%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

*Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.

Certification Marks owned by the Association for Contract Textiles, In

†Available in 66" only



USA & INTERNATIONAL | T 800-544-0200 CANADA | T 418 227-9897


For samples, visit duvaltex.com

Auster 2537



Silverdust 012



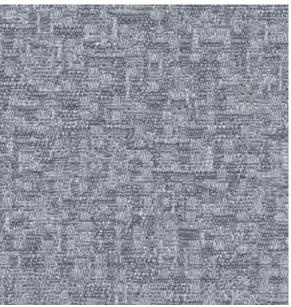



Specifications

Content	71% pre-consumer recycled polyester 29% post-consumer recycled polyester
Weight	11.4 ± 1.0 oz./lin. yd
Width	66" min. useable
Repeat	16" vertical 13.9" horizontal

Auster 2537

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable




Performance










Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

909

For more detailed results, please consult our website





Axiom 3947









Driftwood

Sparrow





7040



Specifications

Axiom 3947

Content	100% pre-consumer recycled polyester
Weight	12.0 ± 1.0 oz./lin. yd
Width	66" min. useable
Repeat	none
Treatment	polyester binder

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Bleach Cleanable - May be cleaned with a 10% bleach-to-water solution. Rinse well after cleaning. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.


Proudly woven in North America supporting our local communities.


Sustainability

100% recycled and recyclable



Performance







Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

95% **Acoustic Transparency:**

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.



Bailey 2299

Paris Frost 7020

Allagash Mist



7010



Platinum 7013

Sherman Pewter 7024

Baxter Beige


7011



Khaki 7012



Cave 7047



Kennebec Blue 7041

Specifications

Bailey 2299

Content	100% pre-consumer recycled polyester	
Weight	8.3 ± 0.5 oz./lin. yd	
Width	66" min. useable	
Repeat	none	
Treatment	polyester binder	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Bleach Cleanable - May be cleaned with a 10% bleach-to-water solution. Rinse well after cleaning. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable





Guilford of Maine

Renowned for its exceptional performance and style, Guilford of Maine has set industry standards in acoustics and panel fabrics for many decades. We present the Guilford of Maine Collection - a selection of timeless fabrics.

Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034)
150 lbf min. warp and 100 lbf min. fill Breaking Strength (ASTM D5034)



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

95%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.



Broadcast 2758


Panel | Acoustic

Broadcast 2758






Serengeti 1196



Chicory



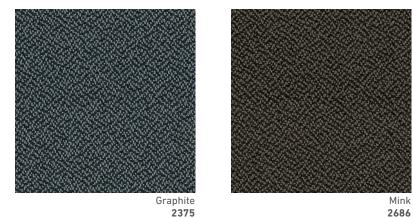

Specifications

Content	100% polyester
Weight	9.5 ± 0.5 oz./lin. yd
Width	66" min. useable
Repeat	none

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Guilford of Maine

Renowned for its exceptional performance and style, Guilford of Maine has set industry standards in acoustics and panel fabrics for many decades. We present the Guilford of Maine Collection - a selection of timeless fabrics.

Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034)
150 lbf min. warp and 100 lbf min. fill Breaking Strength (ASTM D5034)



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

95%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

*Certification Marks owned by the Association for Contract Textiles, Inc.





For samples, visit duvaltex.com

Cape Cod 3073



Cape Cod 3073

Specifications

Content	76% pre-consumer recycled polyester 24% post-consumer recycled polyester	
Weight	12.4 ± 1.0 oz./lin. yd	
Width	66" min. useable	
Repeat	none	
Treatment	polyester binder	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Bleach Cleanable - May be cleaned with a 10% bleach-to-water solution. Rinse well after cleaning. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable



Performance



Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034)
150 lbf min. warp and fill



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

95%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.






Chase 2138


Buff





Ecru 1241





1246

Mist Green 1244

1245



Red Clay

1252







Ochre Chambray 1251





1248

Moss

1250

1242

Chase 2138

Specifications

Content	74% polyester	
	26% post-consumer recycled polyester	
Weight	13.3 ± 1.0 oz./lin. yd	
Width	66" min. useable	
Repeat	none	
Treatment	polyester binder	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.


Miscellaneous


- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Performance









Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Transparency:	95%
	Transparency:

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.



Crosstown 2526







Fieldstone









080

Graphite

Cement

010



Waterfront

061

Specifications

Content	77% pre-consumer recycled polyester 23% post-consumer recycled polyester	
Weight	13.6 ± 1.0 oz./lin. yd	
Width	66" min. useable	
Repeat	12.5" vertical 16.2" horizontal	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable



Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034) Breaking Strength (ASTM D5034)
250 lbf min. warp and 150 lbf min. fill



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

95%

For more detailed results, please consult our website.




This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.




For samples, visit duvaltex.com

Dashing 1204

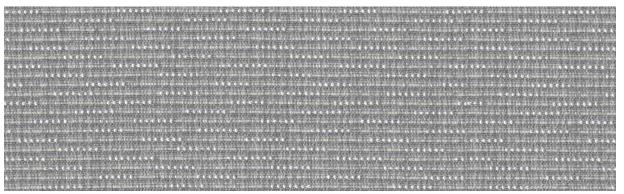

Dapper Grey







Refined Marble





Classic Silver



Genteel Beige



Bespoke Tan

Dashing 1204

Specifications

Content	92% post-consumer recycled polyester 8% pre-consumer recycled polyester	
Weight	10.9 ± 1.0 oz./lin. yd	
Width	66" min. useable	
Repeat	2" vertical 2.4" horizontal	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable



Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours




Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASIM) 240 lbf warp and 190 lbf fill Breaking Strength (ASTM D5034)



Flammability





This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

Dune 4505



Dune 4505

Specifications

Content	100% polyester		
Weight	11.0 ± 1.0 oz./lin. yd		
Width	66" min. useable		
Repeat	16.4" vertical 13.9" horizontal	_	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability



Performance

Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours Colorfastness to crocking (AATCC 8)



Breaking Strength (ASTM D: 160 lbf warp and 110 lbf fill Breaking Strength (ASTM D5034)



Flammability ASTM E84 Class I or A



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.




Essence 4873






Spanish Olive **2632**





Tawny **2630**








2635

Charcoal Melange

2637



Ash

2634

Essence 4873

Specifications

Content	100% polyester
Weight	11.8 ± 1.0 oz./lin. yd
Width	66" min. useable
Repeat	.27" vertical .18" horizontal

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability




Performance











Felt 9900



Specifications

Felt 9900

Content	80% polyester 20% post-consumer recycled polyester	
Weight	10.2 ± 1.0 oz./lin. yd	
Width	64" min. useable	
Repeat	none	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a non-directional fabric.
- * Light fabric are subject to transparency issues depending on lighting intensity and internal structure. Application testing of this product is recommended.

This product is a **Feltväri**™ non-woven.

Proudly woven in North America supporting our local communities.

Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034)
250 lbf min. warp and 125 lbf min. fill Breaking Strength (ASTM D5034)



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

99%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.



Panel | Acoustic

FR701® 2100

White 224	Eggshell	Bone	Wheat	Quartz	Pearl
	144	748	130	380	481
Yellow	Lime	Fir	Verte Papier	Opal	Desert Sand
744	721	743	561	394	758
Sunshine	Sky	Teal	Coin	Silver Papier	Cement Mix
797	740	742	794	538	750
Orange	Sapphire	Ultramarine	Blue Papier	Grey Mix	Silver Neutral
746	745	470	539	238	406
Cardinal	Cobalt	Wedgewood	Crystal Blue	Flannel	Moleskin
738	420	150	175	795	796
Red	lris	Baltic	Steel Grey	Medium Grey	Black
799	798	153	471	298	408

Guilford of Maine Collection

FR701® 2100

Specifications

Content	100% post-consumer recycled polyester	
Weight	16.0 ± 0.5 oz./lin. yd	
Width	66" min. useable	
Repeat	none	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Bleach Cleanable - May be cleaned with a 10% bleachto-water solution. Rinse well after cleaning. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is anon-directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable



Guilford of Maine

Collection

Renowned for its exceptional performance and style, Guilford of Maine has set industry standards in acoustics and panel fabrics for many decades. We present the Guilford of Maine Collection - a selection of timeless fabrics.

Performance



Colorfastness to light (AATCC 16.3 Option 3)
Grade 4 min. at 40 hours





Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034) 150 lbf min. warp and fill



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency: 95%


For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.



Framework 2762

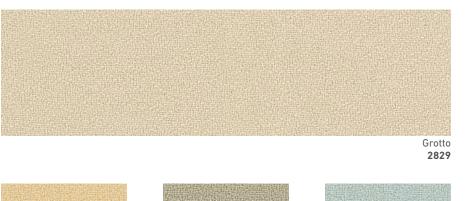




Dove Gray 2689



2552

2687




2554


2555

















Specifications

Content	100% polyester
Weight	9.5 ± 0.5 oz./lin. yd
Width	66" min. useable
Repeat	none

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.



Guilford of Maine

Renowned for its exceptional performance and style, Guilford of Maine has set industry standards in acoustics and panel fabrics for many decades. We present the Guilford of Maine Collection - a selection of timeless fabrics.

Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034)
150 lbf min. warp and 125 lbf min. fill Breaking Strength (ASTM D5034)



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

90%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.


*Certification Marks owned by the Association for Contract Textiles, Inc

2832





Groove 3497

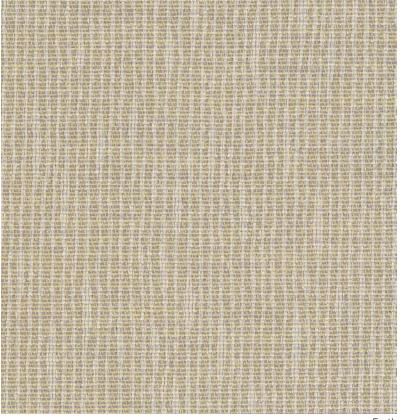

Mocha

040



Winter 022

024



Froth



Groove 3497

Specifications

Content	100% post-consumer recycled polyester	
Weight	15.0 ± 1.0 oz./lin. yd	
Width	66" min. useable	
Repeat	20" vertical 16.75" horizontal	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable



Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASIM D3034)
225 lbf min. warp and 180 lbf min. fill Breaking Strength (ASTM D5034)



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

90%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

*Certification Marks owned by the Association for Contract Textiles. Inc.







For samples, visit duvaltex.com

Intermix 3035

Huskv





Rocket Ship




7041

Neptune 7040

7010



7011



7060



Intermix 3035

Specifications

Content	100% pre-consumer recycled polyester	
Weight	15.3 ± 1.0 oz./lin. yd	
Width	66" min. useable	
Repeat	none	
Treatment	polyester binder	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Bleach Cleanable - May be cleaned with a 10% bleach-to-water solution. Rinse well after cleaning. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.


Proudly woven in North America supporting our local communities.


Sustainability

100% recycled and recyclable



Performance







Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic	Transparency:	95	9

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.



Lido 2858



Specifications

Lido 2858

Content	52% pre-consumer recycled polyester 48% post-consumer recycled polyester	
Weight	11.5 ± 1.0 oz./lin. yd	
Width	66" min. useable	
Repeat	none	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable



Guilford of Maine

Renowned for its exceptional performance and style, Guilford of Maine has set industry standards in acoustics and panel fabrics for many decades. We present the Guilford of Maine Collection - a selection of timeless fabrics.

Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034)
100 lbf min. warp and 125 lbf min. fill Breaking Strength (ASTM D5034)



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

95%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.





Sunfish	Mangrove
1153	1154

Dolphin	Swell	Benthic
1147	1155	1157

Great White	Ice Edge	Clownfish	Intertidal
1143	1145	1152	1156

Tusk	Sea Glass	Red Snapper	Carrageen
1144	1146	1151	1150

Sand	Pelican	Grey Whale	Blacktip
1142	1141	1148	1149

CLEAN IMPACT TEXTILES

Marin 1300



Specifications

Content	90% post-consumer recycled polyester including ocean waste 10% polyester	
Weight	12.5 ± 1.0 oz./lin. yd	
Width	67" min. useable	
Reneat	19.1" vertical 12.76" horizontal	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

OCEAN WASTE CLEAN IMPACT TEXTILES®

For every pound of fabric produced, up to half a pound of marine waste is removed from the ocean.

SEAQUAL

By partnering with the SEAQUAL INITIATIVE, we transform ocean waste into amazing textiles.

Duvaltex is an official and authorized advertiser of SEAQUAL® YARN, the SEAQUAL INITIATIVE and their related trademarks, under licence agreement. Only SEAQUAL licensees are permitted to publicly advertise details about SEAQUAL

Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours





Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034) Breaking Strength (ASIM DOUS4)
245 lbf min. warp and 170 lbf min. fill



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

90%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.



Meander 2660





011



021


Sand Bar











Meander 2660

Specifications

Content	72% pre-consumer recycled polyester 28% post-consumer recycled polyester	
Weight	11.6 ± 0.5 oz./lin. yd	
Width	66" min. useable	
Repeat	10.5" vertical 16.2" horizontal	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable



Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5U34)
225 lbf min. warp and 100 lbf min. fill Breaking Strength (ASTM D5034)



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

95%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.



Metallation 5118

Metallation 5118



Specifications

Content	56% post-consumer recycled polyester 44% polyester
Weight	15.2 ± 0.5 oz./lin. yd
Width	66" min. useable
Repeat	none

Cleaning Code


Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous


- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- \cdot This is a directional fabric.

Proudly woven in North America supporting our local communities.

Performance







Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparer	95%
Acoustic Transparer	95

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.




Metro 3077










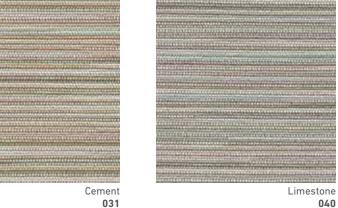




Central Park



020





duvaltex



Specifications

Metro 3077

Content	89% pre-consumer recycled polyester 11% post-consumer recycled polyester
Weight	10.7 ± 1.0 oz./lin. yd
Width	66" min. useable
Repeat	8.57" vertical 14.2" horizontal

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable



Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASIM มอบอล)
250 lbf min. warp and 150 lbf min. fill Breaking Strength (ASTM D5034)



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

95%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

Mingle 2527







041








Green Tea







010

Mingle 2527

Specifications

Content	77% pre-consumer recycled polyester 23% post-consumer recycled polyester	
Weight	10.9 ± 1.0 oz./lin. yd	
Width	66" min. useable	
Repeat	16.7" vertical 16.2" horizontal	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable





Renowned for its exceptional performance and style, Guilford of Maine has set industry standards in acoustics and panel fabrics for many decades. We present the Guilford of Maine Collection - a selection of timeless fabrics.

Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034)
250 lbf min. warp and 100 lbf min. fill Breaking Strength (ASTM D5034)



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

90%

For more detailed results, please consult our website.




This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

*Certification Marks owned by the Association for Contract Textiles, Inc.

051



Netiquette 1241

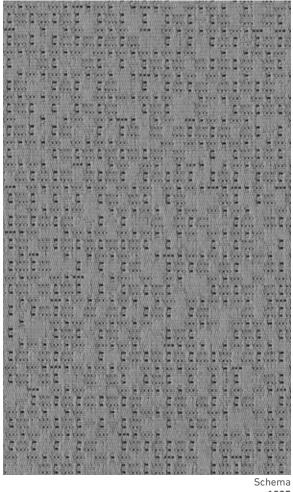

1291

1299

1298





1292

Gamma









Specifications

Content	68% polyester 32% post-consumer recycled polyester	
Weight	9.6 ± 1.0 oz./lin. yd	
Width	66" min. useable	
Repeat	7.25" vertical 14" horizontal	
Treatment	polvester binder	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability



Performance









Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency: 9	5%
--------------------------	----

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

*Certification Marks owned by the Association for Contract Textiles, Inc

For samples, visit duvaltex.com

Off the Grid 1233



Specifications

Content	49% pre-consumer recycled polyester 38% post-consumer recycled polyester 13% polyester
Weight	10.0 ± 1.0 oz./lin. yd
Width	66" min. useable
Repeat	none
Treatment	polyester binder

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous


- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability



Performance








Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:	100%
------------------------	------

For more detailed results, please consult our website.



*Certification Marks owned by the Association for Contract Textiles, Inc





For samples, visit duvaltex.com

Paradise 2659



Paradise is a printable 100% recycled polyester fabric. This capability allows for a unique look in any environment. Please note that Guilford of Maine only supplies the unprinted fabric. Whether it's full color photography, brand recognition or solid blocks of color - the creativity is up to you!

Paradise 2659

Specifications

Content	100% post-consumer recycled polyester
Weight	9.5 ± 0.5 oz./lin. yd
Width	66" min. useable
Repeat	none

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable



Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5U34)
225 lbf min. warp and 125 lbf min. fill **Breaking Strength (ASTM D5034)**



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

90%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.



Panel | Acoustic

Purpose 1302

Wish	Intend
1184	1185

Норе	Strive	Mission	Ambition
1183	1189	1190	1186

ldea	Target	Direction	Objective
1182	1188	1191	1193

Plan	Desire	Focus	Reason
1181	1187	1192	1194

Purpose 1302



Specifications

Content	100% post-consumer recycled biodegradable* polyester
Weight	14.1 ± 1.0 oz./lin. yd
Width	67" min. useable
Reneat	none

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

BIODEGRADABLE* CLEAN IMPACT TEXTILES® address the daunting problem of how to deal with polyester fabric at the end of its useful life.

Biodegradable* in landfill after 1,278 days (tested under ASTM D5511)

*Rate and extent of biodegradation into elements found in nature is 91% after 1,278 days under ASTM D5511 (Anaerobic Biodegradation of Plastic Materials Under High Solids Anaerobic Digestion Conditions). The test was done with the same component (PET) polyester and biocatalyst additive. No evidence of further degradation.

Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours




Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034) Breaking Strength (ASIM มอบ34)
205 lbf min. warp and 215 lbf min. fill



Flammability



Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

95% **Acoustic Transparency:**

For more detailed results, please consult our website.




This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.



Pursuit 3034





7040

7011







Elephar **703**

Whisper **7010**

Cement 7030

Pursuit 3034

Specifications

Content	100% pre-consumer recycled polyester	
Weight	9.1 ± 0.5 oz./lin. yd	
Width	66" min. useable	
Repeat	none	
Treatment	polyester binder	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Bleach Cleanable - May be cleaned with a 10% bleach-to-water solution. Rinse well after cleaning. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.


Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable



Performance







Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoust	tic Transparency:	100%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

Rattan 3087







030





Alabaster 021



Tuscan







Rattan 3087

Specifications

Content	66% pre-consumer recycled polyester 34% post-consumer recycled polyester	
Weight	14.7 ± 1.0 oz./lin. yd	
Width	66" min. useable	
Repeat	17.7" vertical 13.9" horizontal	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Bleach Cleanable - May be cleaned with a 10% bleach-to-water solution. Rinse well after cleaning. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability


100% recycled and recyclable



Performance









Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

90%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.



Reeds 3078



Greystone 020



010





Sand 041

050



Moss 051

Reeds 3078

Specifications

Content	74% post-consumer recycled polyester 26% pre-consumer recycled polyester	
Weight	11.6 ± 1.0 oz./lin. yd	
Width	66" min. useable	
Repeat	12.5" vertical 16.9" horizontal	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable



Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034) Breaking Strength (ASIM มอบอล)
250 lbf min. warp and 150 lbf min. fill



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

90%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

*Certification Marks owned by the Association for Contract Textiles, Inc.



For samples, visit duvaltex.com

Biodegradable* Recycled Content Bleach Cleanable Panel | Acoustic

Courage

Conclude

1206

1201

Resolve 1301

Zeal

1207

Fortitude

1205

Clarify	Effect	Manage	Bold
1202	1203	1204	1199
Earnest	Decide	Plan	Explain
1194	1195	1198	1200

Attain

1197

Resolve 1301



Specifications

Content	100% post-consumer recycled biodegradable* polyester	
Weight	16.1 ± 1.0 oz./lin. yd	
Width	67" min. useable	
Repeat	32" vertical 12.7" horizontal	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Bleach Cleanable - May be cleaned with a 10% bleach-to-water solution. Rinse well after cleaning. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

BIODEGRADABLE* CLEAN IMPACT TEXTILES®

address the daunting problem of how to deal with polyester fabric at the end of its useful life.

Biodegradable* in landfill after 1,278 days (tested under ASTM D5511)

*Rate and extent of biodegradation into elements found in nature is 91% after 1,278 days under ASTM D5511 (Anaerobic Biodegradation of Plastic Materials Under High Solids Anaerobic Digestion Conditions). The test was done with the same component (PET) polyester and biocatalyst additive. No evidence of further degradation.

Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034) Breaking Strength (ASTM D5034)
315 lbf min. warp and 405 lbf min. fill



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

90%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

*Certification Marks owned by the Association for Contract Textiles, Inc.



Intention

1196

Spinel 3582















Specifications

Spinel 3582

Content	68% pre-consumer recycled polyester 32% post-consumer recycled polyester	
Weight	11.8 ± 1.0 oz./lin. yd	
Width	66" min. useable	
Repeat	16.5" vertical and horizontal	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable





Guilford of Maine

Collection

Renowned for its exceptional performance and style, Guilford of Maine has set industry standards in acoustics and panel fabrics for many decades. We present the Guilford of Maine Collection - a selection of timeless fabrics.

Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (AS וא בטפט אל, 220 lbf min. warp and 90 lbf min. fill Breaking Strength (ASTM D5034)



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

95%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

*Certification Marks owned by the Association for Contract Textiles, Inc.

021

Sprite 2671



7040



Linen

7010

7012

Kiwi

7031




Powder

7011








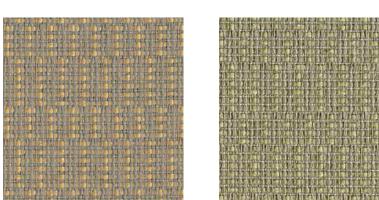

7032

Butter



Sprite 2671

Specifications

Content	95% pre-consumer recycled polyester 5% post-consumer recycled polyester	
Weight	10.8 ± 0.5 oz./lin. yd	
Width	66" min. useable	
Repeat	7.25" vertical 14" horizontal	
Treatment	polyester binder	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Bleach Cleanable - May be cleaned with a 10% bleach-to-water solution. Rinse well after cleaning. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable





Guilford of Maine

Collection

Renowned for its exceptional performance and style, Guilford of Maine has set industry standards in acoustics and panel fabrics for many decades. We present the Guilford of Maine Collection - a selection of timeless fabrics.

Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM 175 lbf min. warp and fill Breaking Strength (ASTM D5034)



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

95%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.



Strata 2968

Strata 2968





030





031







Specifications

Content	100% pre-consumer recycled polyester	
Weight	11.8 ± 1.0 oz./lin. yd	
Width	66" min. useable	
Repeat	.1" vertical none horizontal	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.s.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable



Guilford of Maine

Renowned for its exceptional performance and style, Guilford of Maine has set industry standards in acoustics and panel fabrics for many decades. We present the Guilford of Maine Collection - a selection of timeless fabrics.

Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASIM DOUGH)
200 lbf min. warp and 100 lbf. fill Breaking Strength (ASTM D5034)



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

95%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.



Studio 54 2966

 Stardust
 Disco
 Ross

 7051
 7030
 7044

 Gloria
 Glam
 Hustle

 7020
 7040
 7032

ShimmerCelebrityFlashyStayin' Alive7041704570437010

Specifications

Treatment	polyester binder
Repeat	.1" vertical none horizontal
Width	66" min. useable
Weight	12.8 ± 1.0 oz./lin. yd
Content	100% polypropylene

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Bleach Cleanable - May be cleaned with a 10% bleachto-water solution. Rinse well after cleaning. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · Variation in texture and luster, due to the manufacturing process, is to be expected and is part of the inherent beauty of Studio 54.

Proudly woven in North America supporting our local communities.



Renowned for its exceptional performance and style, Guilford of Maine has set industry standards in acoustics and panel fabrics for many decades. We present the Guilford of Maine Collection - a selection of timeless fabrics.

Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours





Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034) 100 lbf min. warp and 250 lbf min. fill



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

95%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

*Multiple factors affect fabric durability and appearance retention, including end-user application and proper maintenance. Wyzenbeek results above 100,000 double rubs have not been shown to be an indicator of increased lifespan.



Tempest 2120

045

Ginger









Full Stream 012



031

Slate

025

023

Tumbleweed 030



Dragonfly



Tempest 2120

Specifications

Content	100% pre-consumer recycled polyester	
Weight	11.3 ± 1.0 oz./lin. yd	
Width	66" min. useable	
Repeat	none	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable



Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASIM אליטפע און 180 lbf min. warp and 160 lbf fill Breaking Strength (ASTM D5034)



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

95%

For more detailed results, please consult our website.




This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.



Citrus 021

020

Theory 3006

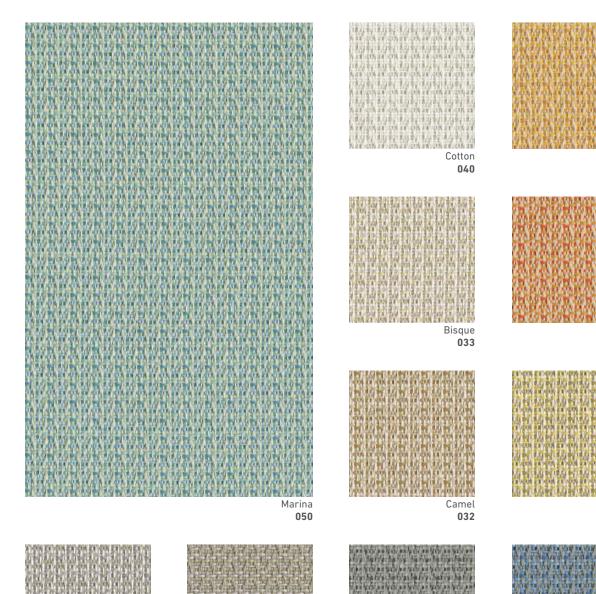

Truffle

012

Theory 3006

Specifications

Content	100% pre-consumer recycled polyester	
Weight	10.8 ± 1.0 oz./lin. yd	
Width	66" min. useable	
Repeat	none	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Bleach Cleanable - May be cleaned with a 10% bleach-to-water solution. Rinse well after cleaning. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable



Performance





Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (ASTM D5034) Breaking Strength (ASTM D5034)
175 lbf min. warp and 150 lbf min. fill



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

100%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

*Certification Marks owned by the Association for Contract Textiles, Inc.



Lagoon

011

Shadow

010



Tweed 2737



Specifications

Tweed 2737

Content	75% pre-consumer recycled polyester25% post-consumer recycled polyester	
Weight	11.7 ± 1.0 oz./lin. yd	
Width	66" min. useable	
Repeat	none	

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability

100% recycled and recyclable

Performance



Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours



Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet



Breaking Strength (אכינכע שוב 225 lbf min. warp and 175 lbf fill Breaking Strength (ASTM D5034)



Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:

95%

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.



Panel | Acoustic

Whisper 1240



Specifications

Content	53% post-consumer recycled polyester 47% polyester
Weight	10.9 ± 1.0 oz./lin. yd
Width	66" min. useable
Repeat	none
Treatment	polyester binder

Whisper 1240

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous


- · Application testing of this product is recommended.
- · Colors may vary between dye lots.
- · This is a directional fabric.

Proudly woven in North America supporting our local communities.

Sustainability



Performance







Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:	95%

For more detailed results, please consult our website.

