


C0 Stain Repellent

Seating


Frolic 5000

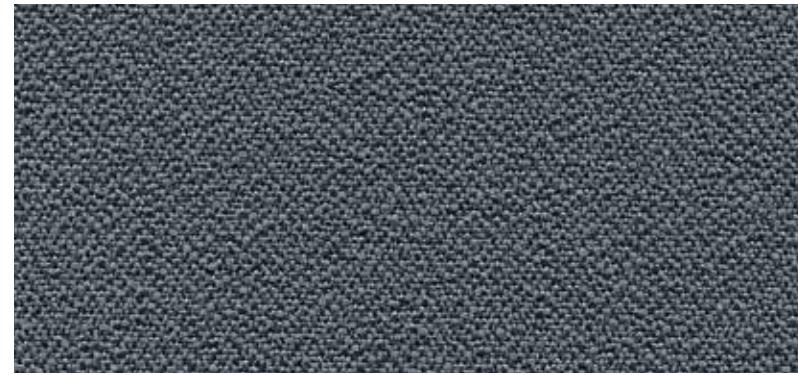

Slate
0011



Red
0002

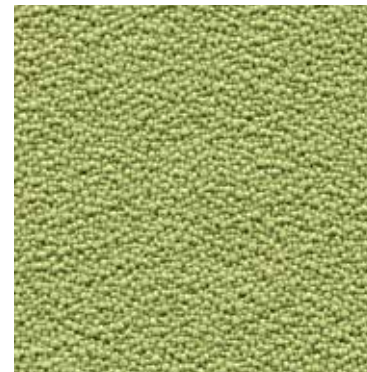

Cactus
0017




Blue
0004



Aubergine
0072



Pine
0007

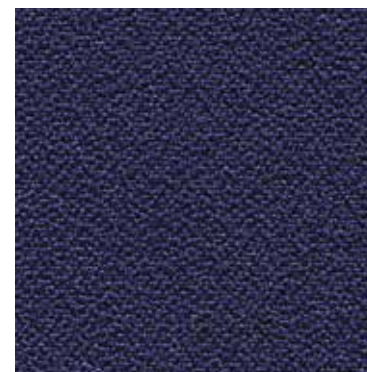

Navy
0014



Ink
0006

duvaltex

Frolic 5000

Seating

Specifications

Content	100% polyester
Weight	16.7 ± 1.0 oz./lin. yd 378 g/m ² (± 5%)
Width	54" min. useable 137 cm min. useable
Repeat	none
Backing	acrylic backcoating
Treatment	C0 stain repellent

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- Application testing of this product is recommended.
- Colors may vary between dye lots.
- This is a directional fabric.

Performance

- Colorfastness to light (AATCC 16.3 Option 3)**
Grade 4 min. at 40 hours
- Colorfastness to crocking (AATCC 8)**
Grade 4 min. dry & Grade 3 min. wet
- Breaking Strength (ASTM D5034)**
250 lbf min. warp and fill
- Seam Slippage (ASTM D4034)**
50 lbf min. warp and fill
- Pilling Resistance (ASTM D3511)**
Class 4 min.
- Flammability**
CA Technical Bulletin 117-2013 Section 1
EN 1021-1 Cigarette
EN 1021-2 Match
Flammability performance may vary depending on the substrate used.
- Abrasion (ASTM D4157)**
Wyzenbeek Abrasion Resistance (ASTM D4157)
100,000 double rubs min. cotton duck
Martindale Abrasion Resistance (ISO 12947-2)
85,000 cycles

*Certification Marks owned by the Association for Contract Textiles, Inc.

duvaltex

USA & INTERNATIONAL | T 800-544-0200
CANADA | T 418 227-9897
For samples, visit duvaltex.com



FC-5000 26/02