


Off the Grid 1233

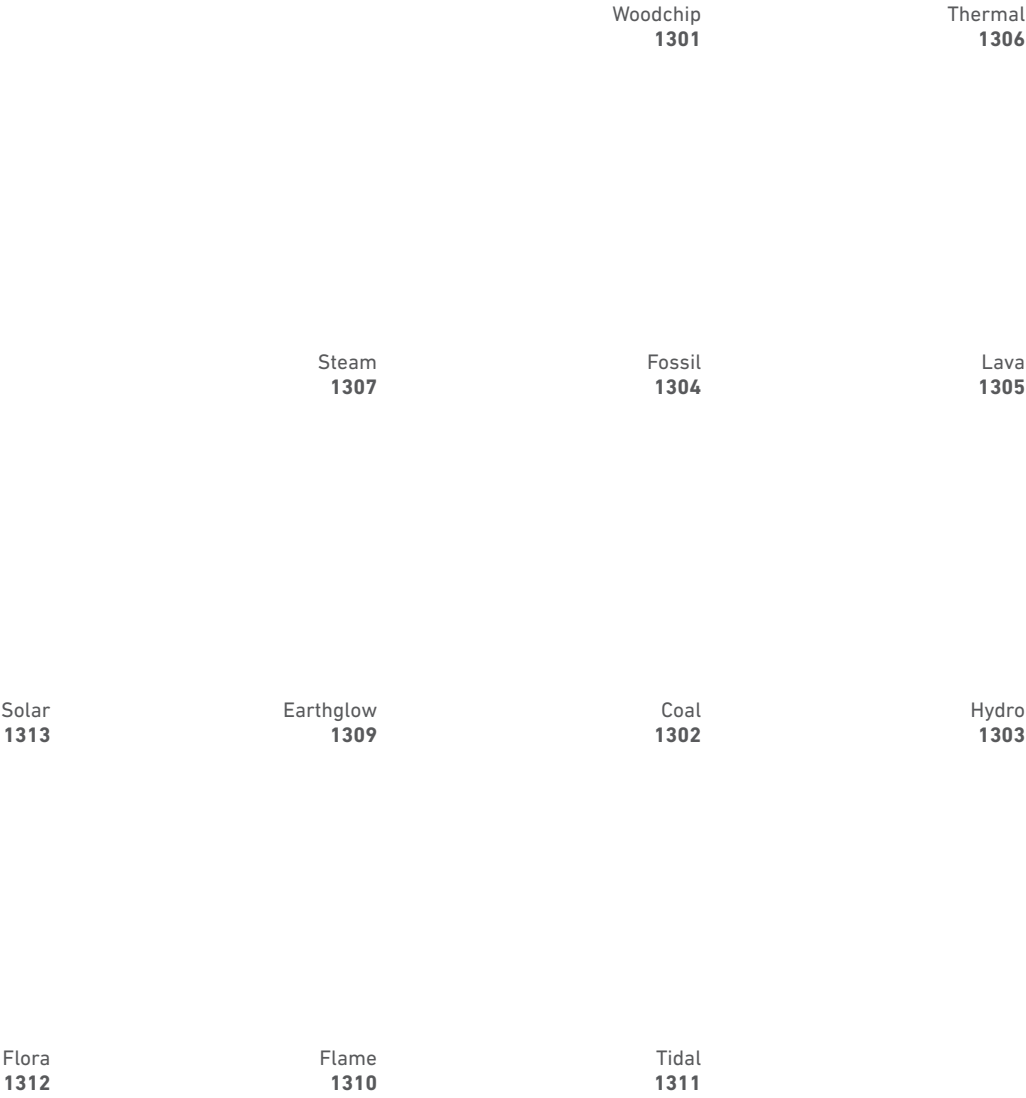

Off the Grid 1233

Specifications

Content	49% pre-consumer recycled polyester 38% post-consumer recycled polyester 13% polyester
Weight	10.0 ± 1.0 oz./lin. yd 182 g/m ² (± 5%)
Width	66" min. useable 168 cm min. useable
Repeat	none
Treatment	polyester binder
Tackable	yes

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup. May also be disinfected with hydrogen peroxide, alcohol, and quaternary ammonium (quat) based cleaners.

Miscellaneous

- Application testing of this product is recommended.
- Colors may vary between dye lots.
- This is a directional fabric.
- Tackable properties may vary depending on fabric structure and recovery characteristics.

Proudly woven in North America supporting our local communities.

Performance

	Colorfastness to light (AATCC 16.3 Option 3) Grade 4 min. at 40 hours
	Colorfastness to crocking (AATCC 8) Grade 4 min. dry & Grade 3 min. wet
	Breaking Strength (ASTM D5034) 185 lbf warp and 165 lbf fill
	Flammability ASTM E84 Class I or A

Acoustical Performance

Our acoustic fabrics are all acoustically transparent. This represents the amount of sound that passes through the fabric.

Acoustic Transparency:	100%
-------------------------------	------

For more detailed results, please consult our website.



This pattern is included in the underwriters laboratory panel fabric recognition program. Additional testing of this U.L. recognized fabric is not required on approved panels from participating manufacturers.

*Certification Marks owned by the Association for Contract Textiles, Inc.