

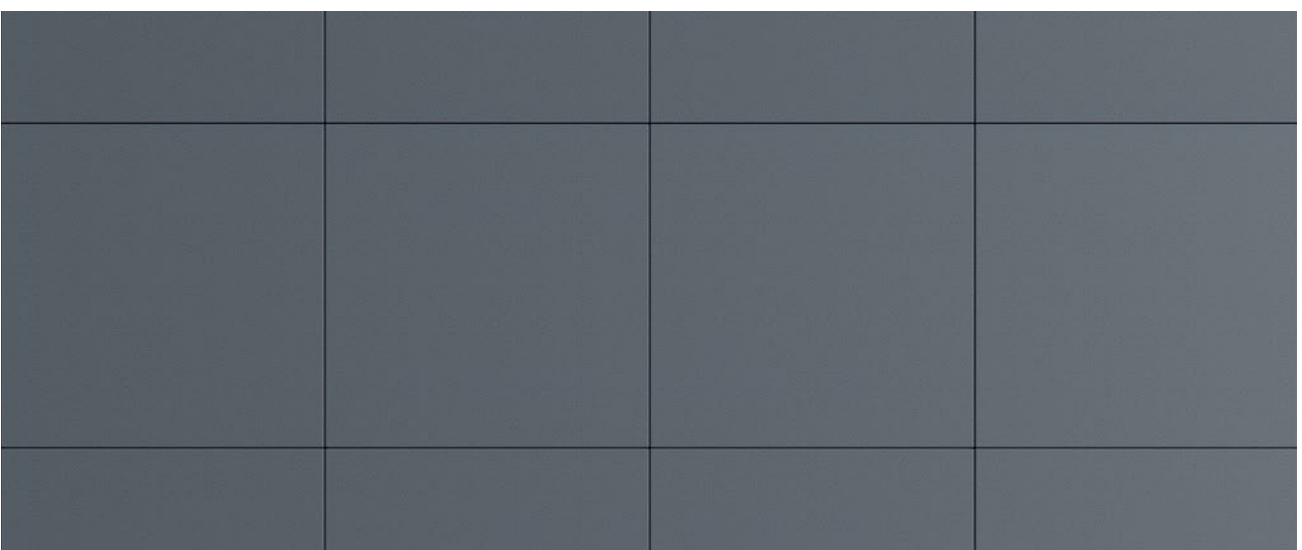




ZEN

REGULAR INSTALLATION

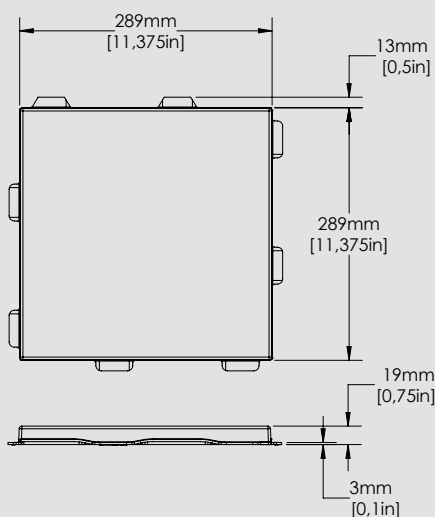

COMPOSITION

- ① Fabric and color, selected by client
- ② Acoustic structure: 100% Polyester
- ③ Acoustic Lining: Stone wool

PRODUCT INFORMATION

	Dimensions W x H	Thickness	Acoustic Surface Area	Product Code†	Walls & Ceilings	Concealed grid	Baffles*	Clouds*
	24 x 24 in 610 x 610 mm	1 in 25 mm	4 ft ² 0.372 m ²	ZENA-2424-R-X-****-****	●	●	●	●
	24 x 24 in 610 x 610 mm	0.6 in 15 mm	4 ft ² 0.372 m ²	ZENA-2424-T-X-****-****	●	—	●	●
	24 x 12 in 610 x 305 mm	1 in 25 mm	2 ft ² 0.186 m ²	ZENA-2412-R-X-****-****	●	—	●	—
	22.75 x 22.75 in 578 x 578 mm	0.75 in 19 mm	3.6 ft ² 0.093 m ²	ZENA-2323-R-X-****-****	●	—	—	—
	11.375 x 11.375 in 289 x 289 mm	0.75 in 19 mm	0.90 ft ² 0.084 m ²	ZENA-1111-R-X-****-****	●	—	—	—

Perimeter Moldings



Artotrim-C1
ARTC-1144-M-X-0000-0002

- Perimeter molding for full tiles (all formats and thicknesses)
- Compatible with Zen tiles trimmed to **0.75 in thickness or less**



Artotrim-C3
ARTC-3144-M-X-0000-0002

- Perimeter molding for Zen tiles trimmed to **1 in thickness only**
- Allows adjustment to wall and/or ceiling
- Finishing molding for obstacles (ex: light fixture, power outlet, electric baseboard, etc.)

STANDARD FABRICS

100% polyester (% of recycled fibers varies by fabric)
Intertek Clean Air Gold certified for very low VOC emissions
For available styles, consult our website.

FLAMMABILITY

ASTM-E-84: Class A
CAN/ULC-S102.2

ACOUSTIC PERFORMANCE**

Noise Reduction Coefficient (Hz)
NRC 0.80

†Fabrics

Replace ****-**** with the style number of the fabric, followed by the color number.

*Baffles and Clouds

For available formats, consult the product sheets or visit our website.

TILE LAYOUT

Need to be inspired? Visit our website www.duvaltex.com for more details on our products and possible layouts. You can also contact us or reach out to one of our authorized local distributors.

***Results were determined through testing conducted by an independent, certified laboratory according to industry standards. ASTM C423 - Standard test method for sound absorption coefficients by the reverberation room method. See the Acoustic Performance sheet for more information.

Drawings not to scale. Do not use as template. The information contained in this document is the property of Duvaltex. Reproduction is prohibited.

Artotex Product Data Sheets 26-09

duvaltex.com

1-450-646-7555

solutions@duvaltex.com

duvaltex